

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: C08F 4/603, 10/00	A1	(11) International Publication Number: WO 97/35893 (43) International Publication Date: 2 October 1997 (02.10.97)
(21) International Application Number: PCT/US97/04234 (22) International Filing Date: 14 March 1997 (14.03.97) (30) Priority Data: 60/014,284 27 March 1996 (27.03.96) US (71) Applicant: THE DOW CHEMICAL COMPANY [US/US]; 2030 Dow Center, Midland, MI 48674 (US). (72) Inventors: ROSEN, Robert, K.; 5414 Avondale Drive, Sugar Land, TX 77479 (US). VANDERLENDE, Daniel, D.; Apartment 1433, 2222 Settlers Way Boulevard, Sugar Land, TX 77478 (US). (74) Agent: DELINE, Douglas, N.; The Dow Chemical Company, Patent Dept., P.O. Box 1967, Midland, MI 48641-1967 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>
(54) Title: HIGHLY SOLUBLE OLEFIN POLYMERIZATION CATALYST ACTIVATOR (57) Abstract A catalyst activator, comprising a cation which is a Bronsted acid capable of donating a proton, and an inert, compatible, noncoordinating, anion, characterized by a solubility constant at 25 °C in hexane, cyclohexane or methylcyclohexane of at least 5 weight percent.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

HIGHLY SOLUBLE OLEFIN POLYMERIZATION CATALYST ACTIVATOR

The present invention relates to a catalyst activator. More particularly the present invention relates to a catalyst activator particularly adapted for use in a solution polymerization process for polymerization of α -olefins. Such an activator is particularly advantageous for use in a continuous solution polymerization process wherein catalyst, catalyst activator, and at least one polymerizable monomer are continuously added to a reactor operating under solution polymerization conditions, and polymerized product is continuously removed therefrom.

It is previously known in the art to activate Ziegler-Natta polymerization catalysts, particularly such catalysts comprising Group 4 metal complexes containing delocalized π -bonded ligand groups, by the use of Bronsted acid salts capable of transferring a proton to form a cationic derivative of such Group 4 metal complex. Preferred Bronsted acid salts are such compounds containing a noncoordinating anion that is capable of stabilizing the resulting Group 4 metal cation, especially tetrakis(pentafluorophenyl)borate. Examples of such Bronsted acid salt activators, which are a species of ionic activator, are protonated ammonium, sulfonium, or phosphonium salts disclosed in US-A-5,198,401, US-A-5,132,380, US-A-5,470,927, and US-A-5,153,157.

Due to the fact that such activators are fully ionized and the corresponding anion is highly noncoordinating, such activators are extremely effective as olefin polymerization catalyst activators. Disadvantageously, however, because they are ionic salts, such activators are extremely insoluble in aliphatic hydrocarbons and only sparingly soluble in aromatic solvents. It is desirable to conduct most polymerizations of α -olefins in aliphatic hydrocarbon solvents due to the compatibility of such solvents with the monomer and in order to reduce the aromatic hydrocarbon content of the resulting polymer product. Normally, ionic salt activators need to be added to such polymerizations in the form of a solution in an aromatic solvent such as toluene. The use of even a small quantity of such an aromatic solvent for this purpose is undesirable since it must be removed in a devolatilization step and separated from other volatile components, a process that adds significant cost and complexity to any commercial process. In addition, the foregoing ionic cocatalysts often exist in the form of an oily, intractable material which is not readily handled and metered or precisely incorporated into the reaction mixture.

Accordingly, it would be desirable if there were provided an ionic catalyst activator that could be employed in solution polymerizations that use an aliphatic

solvent, including condensed α -olefin monomer. In addition it would be desirable to provide a new form of ionic catalyst activator that is particularly adapted for use in a continuous solution polymerization reaction where controlled addition of specific quantities of such activator is required.

- 5 According to the present invention there is now provided a catalyst activator, comprising a cation which is a Bronsted acid capable of donating a proton, and an inert, compatible, noncoordinating, anion, characterized by a solubility at 25 °C in hexane, cyclohexane or methylcyclohexane of at least 5 weight percent, preferably at least 7.5 weight percent. Additionally according to the present invention there is
- 10 provided a solution polymerization of an α -olefin comprising contacting one or more α -olefins, optionally in the presence of an inert aliphatic, alicyclic or aromatic hydrocarbon, with a catalyst system comprising the above described catalyst activator.

- 15 By the use of the foregoing catalyst activator, improved catalyst activation is provided. More particularly, increased catalyst efficiency and rate of polymerization are obtained, especially under solution polymerization conditions, most especially continuous, solution polymerization conditions.

- 20 All references herein to elements belonging to a certain Group refer to the Periodic Table of the Elements published and copyrighted by CRC Press, Inc., 1989. Also any reference to the Group or Groups shall be to the Group or Groups as reflected in this Periodic Table of the Elements using the IUPAC system for numbering groups.

- 25 The catalyst activators of the invention are further characterized in the following manner. Preferred anions are those containing a single coordination complex comprising a charge bearing metal or metalloid core which anion is capable of balancing the charge of the active catalyst species (the metal cation) which is formed when the two components are combined. Also, said anion should be sufficiently labile to be displaced by olefinic, diolefinic and acetylenically unsaturated compounds or neutral Lewis bases such as ethers, amines or nitriles. Suitable
- 30 metals include, but are not limited to, aluminum, gold and platinum. Suitable metalloids include, but are not limited to, boron, phosphorus, and silicon. Compounds containing anions which comprise coordination complexes containing a single metal or metalloid atom are, of course, well known and many, particularly such compounds containing a single boron atom in the anion portion, are available
- 35 commercially. Therefore, said single boron atom compounds are preferred.


Preferably the cocatalysts of the invention may be represented by the following general formula: $(L^*-H)_d^+(A^{d-})$, wherein:

L^* is a neutral Lewis base;

$(L^*-H)^+$ is a Bronsted acid;

5 A^{d-} is a noncoordinating, compatible anion having charge d^- , and d is an integer from 1 to 3.

Examples of suitable anions of the formula A^{d-} include sterically shielded diboron anions corresponding to the formula:



10 wherein:

S is alkyl, fluoroalkyl, aryl, or fluoroaryl (and where two S groups are present additionally hydrogen),

Ar^F is fluoroaryl, and

X^1 is either hydrogen or halide.

15 Such diboron anions are disclosed in US-A-5,447,895.

Additional examples of A^{d-} anions are those anions corresponding to the formula: $[M'^k + Q_{n'}]^{d-}$, wherein:

k is an integer from 1 to 3;

n' is an integer from 2 to 6;

20 $n' - k = d$;

M' is an element selected from Group 13 of the Periodic Table of the Elements; and

25 Q independently each occurrence is selected from hydride, dialkylamido, halide, alkoxide, aryloxy, hydrocarbyl, and halosubstituted-hydrocarbyl radicals, said Q having up to 20 carbons with the proviso that in not more than one occurrence is Q halide.

In a more preferred embodiment, d is one, that is, the counter ion has a single negative charge and corresponds to the formula, A^- . Activating cocatalysts

comprising boron which are particularly useful in this invention may be represented by the following general formula: $[L^+-H]^+ [BQ'_4]^-$, wherein:

- L^+ is a nitrogen, sulfur or phosphorus containing neutral Lewis base;
- B is boron in an oxidation state of 3; and
- 5 Q' is a fluorinated C_{1-20} hydrocarbyl group.

Most preferably, Q' is in each occurrence a fluorinated aryl group, especially a pentafluorophenyl group.

Generally, solubility of the catalyst activators of the invention in aliphatic compounds is increased by incorporation of one or more oleophilic groups such as
 10 long chain alkyl groups; long chain alkenyl groups; or halo-, alkoxy-, amino-, silyl-, or germyl- substituted long chain alkyl groups or long chain alkenyl groups into the Bronsted acid, L. By the term "long chain" are meant groups having from 10 to 50 non-hydrogen atoms in such group, preferably in a non-branched form. Preferably such L groups contain from 1 to 3 C_{10-40} n-alkyl groups with a total of from 12 to 100
 15 carbons, more preferably 2 C_{10-40} alkyl groups and from 21 to 90 total carbons. The presence of such oleophilic groups is believed to render the activator more soluble in aliphatic liquids thereby improving the effectiveness in catalyst activation. It is understood that the catalyst activator may comprise a mixture of oleophilic groups of differing lengths. For example, one suitable activator is the protonated ammonium
 20 salt derived from the commercially available long chain amine comprising a mixture of two C_{14} , C_{16} or C_{18} alkyl groups and one methyl group. Such amines are available from Witco Corp., under the trade name Kemamine™ T9701, and from Akzo-Nobel under the trade name Armeen™ M2HT. The present cocatalysts may be used in reduced concentrations based on amount of metal complex compared to the amounts
 25 of prior known cocatalysts previously required, while retaining equivalent or improved catalyst efficiencies.


Illustrative, but not limiting examples of boron compounds which may be used as ionic activating cocatalysts in this invention are tri-substituted ammonium salts such as:

- 30 decyldi(methyl)ammonium tetrakis(pentafluorophenyl) borate,
- dodecyldi(methyl)ammonium tetrakis(pentafluorophenyl) borate,
- tetradecyldi(methyl)ammonium tetrakis(pentafluorophenyl) borate,
- hexaadecyldi(methyl)ammonium tetrakis(pentafluorophenyl) borate,
- octadecyldi(methyl)ammonium tetrakis(pentafluorophenyl) borate,
- 35 eicosyldi(methyl)ammonium tetrakis(pentafluorophenyl) borate,
- methyldi(decyl)ammonium tetrakis(pentafluorophenyl) borate,

- methyldi(dodecyl)ammonium tetrakis(pentafluorophenyl) borate,
 methyldi(tetradecyl)ammonium tetrakis(pentafluorophenyl) borate,
 methyldi(hexadecyl)ammonium tetrakis(pentafluorophenyl) borate,
 methyldi(octadecyl)ammonium tetrakis(pentafluorophenyl) borate,
 5 methyldi(eicosyl)ammonium tetrakis(pentafluorophenyl) borate,
 tridecylammonium tetrakis(pentafluorophenyl) borate,
 tridodecylammonium tetrakis(pentafluorophenyl) borate,
 tritetradecylammonium tetrakis(pentafluorophenyl) borate,
 trihexadecylammonium tetrakis(pentafluorophenyl) borate,
 10 trioctadecylammonium tetrakis(pentafluorophenyl) borate,
 trieicosylammonium tetrakis(pentafluorophenyl) borate,
 decyldi(n-butyl)ammonium tetrakis(pentafluorophenyl) borate,
 dodecyldi(n-butyl)ammonium tetrakis(pentafluorophenyl) borate,
 octadecyldi(n-butyl)ammonium tetrakis(pentafluorophenyl) borate,
 15 N,N-didodecylanilinium tetrakis(pentafluorophenyl) borate,
 N-methyl-N-dodecylanilinium tetrakis(pentafluorophenyl) borate,
 N,N-di(octadecyl)(2,4,6-trimethylanilinium) tetrakis(pentafluorophenyl) borate,
 cyclohexyldi(dodecyl)ammonium tetrakis(pentafluorophenyl) borate, and
 methyldi(dodecyl)ammonium tetrakis-(2,3,4,6-tetrafluorophenyl) borate.
 20 Suitable similarly substituted sulfonium or phosphonium salts such as,
 di(decyl)sulfonium tetrakis(pentafluorophenyl) borate,
 (n-butyl)dodecylsulfonium tetrakis(pentafluorophenyl) borate, tridecylphosphonium
 tetrakis(pentafluorophenyl) borate,
 di(octadecyl)methylphosphonium tetrakis(pentafluorophenyl) borate, and
 25 tri(tetradecyl)phosphonium tetrakis(pentafluorophenyl) borate, may also be named.

Preferred activators are di(octadecyl)methylammonium
 tetrakis(pentafluorophenyl)borate and di(octadecyl)(n-butyl)ammonium
 tetrakis(pentafluorophenyl)borate.

- 30 Suitable catalysts for use herein include any compound or complex of a metal
 of Groups 3-10 of the Periodic Table of the Elements capable of being activated to
 olefin insertion and polymerization by the present ammonium salt activators.
 Examples include Group 10 diimine derivatives corresponding to the formula:



M* is Ni(II) or Pd(II);

K is halo, hydrocarbyl, or hydrocarbyloxy;

Ar* is an aryl group, especially 2,6-diisopropylphenyl or aniline group;

CT-CT is 1,2-ethanediyl, 2,3-butanediyl, or form a fused ring system wherein
5 the two T groups together are a 1,8-naphthanediyl group; and

A⁻ is an inert noncoordinating anion.

The foregoing catalysts are disclosed by M. Brookhart, et al., in J. Am. Chem. Soc., 118, 267-268 (1996) and J. Am. Chem. Soc., 117, 6414 -6415 (1995), as being
10 or in combination with polar comonomers such as vinyl chloride, alkyl acrylates and alkyl methacrylates.


Additional catalysts include derivatives of Group 3, 4, or Lanthanide metals which are in the +2, +3, or +4 formal oxidation state. Preferred compounds include
15 metal complexes containing from 1 to 3 π -bonded anionic or neutral ligand groups, which may be cyclic or non-cyclic delocalized π -bonded anionic ligand groups. Exemplary of such π -bonded anionic ligand groups are conjugated or nonconjugated, cyclic or non-cyclic dienyl groups, allyl groups, boratabenzene groups, and arene groups. By the term " π -bonded" is meant that the ligand group is bonded to the transition metal by a sharing of electrons from a partially delocalized π -bond.

20 Each atom in the delocalized π -bonded group may independently be substituted with a radical selected from the group consisting of hydrogen, halogen, hydrocarbyl, halohydrocarbyl, hydrocarbyl-substituted metalloid radicals wherein the metalloid is selected from Group 14 of the Periodic Table of the Elements, and such hydrocarbyl- or hydrocarbyl-substituted metalloid radicals further substituted with a
25 Group 15 or 16 hetero atom containing moiety. Included within the term "hydrocarbyl" are C₁₋₂₀ straight, branched and cyclic alkyl radicals, C₆₋₂₀ aromatic radicals, C₇₋₂₀ alkyl-substituted aromatic radicals, and C₇₋₂₀ aryl-substituted alkyl radicals. In addition two or more such radicals may together form a fused ring system, including partially or fully hydrogenated fused ring systems, or they may form a metallocycle
30 with the metal. Suitable hydrocarbyl-substituted organometalloid radicals include mono-, di- and tri-substituted organometalloid radicals of Group 14 elements wherein each of the hydrocarbyl groups contains from 1 to 20 carbon atoms. Examples of suitable hydrocarbyl-substituted organometalloid radicals include trimethylsilyl, triethylsilyl, ethyldimethylsilyl, methyldiethylsilyl, triphenylgermyl, and trimethylgermyl groups.
35 Examples of Group 15 or 16 hetero atom containing moieties include amine, phosphine, ether or thioether moieties or divalent derivatives thereof, e. g. amide,

phosphide, ether or thioether groups bonded to the transition metal or Lanthanide metal, and bonded to the hydrocarbyl group or to the hydrocarbyl-substituted metalloid containing group.


- Examples of suitable anionic, delocalized π -bonded groups include
- 5 cyclopentadienyl, indenyl, fluorenyl, tetrahydroindenyl, tetrahydrofluorenyl, octahydrofluorenyl, pentadienyl, cyclohexadienyl, dihydroanthracenyl, hexahydroanthracenyl, decahydroanthracenyl groups, and boratabenzene groups, as well as C_{1-10} hydrocarbyl-substituted or C_{1-10} hydrocarbyl-substituted silyl substituted derivatives thereof. Preferred anionic delocalized π -bonded groups are
 - 10 cyclopentadienyl, pentamethylcyclopentadienyl, tetramethylcyclopentadienyl, tetramethylsilylcyclopentadienyl, indenyl, 2,3-dimethylindenyl, fluorenyl, 2-methylindenyl, 2-methyl-4-phenylindenyl, tetrahydrofluorenyl, octahydrofluorenyl, and tetrahydroindenyl.

- The boratabenzenes are anionic ligands which are boron containing
- 15 analogues to benzene. They are previously known in the art having been described by G. Herberich, et al., in Organometallics, 14,1, 471-480 (1995). Preferred boratabenzenes correspond to the formula:



- wherein R'' is selected from the group consisting of hydrocarbyl, silyl, or germyl, said
- 20 R'' having up to 20 non-hydrogen atoms. In complexes involving divalent derivatives of such delocalized π -bonded groups one atom thereof is bonded by means of a covalent bond or a covalently bonded divalent group to another atom of the complex thereby forming a bridged system.

- A suitable class of catalysts are transition metal complexes corresponding to
- 25 the formula:



wherein:

- L is an anionic, delocalized, π -bonded group that is bound to M , containing up to 50 non-hydrogen atoms, optionally two L groups may be joined together forming a
- 30 bridged structure, and further optionally one L may be bound to X ;

M is a metal of Group 4 of the Periodic Table of the Elements in the +2, +3 or +4 formal oxidation state;

X is an optional, divalent substituent of up to 50 non-hydrogen atoms that together with L forms a metallocycle with M;

5 X' is an optional neutral ligand having up to 20 non-hydrogen atoms;

X'' each occurrence is a monovalent, anionic moiety having up to 40 non-hydrogen atoms, optionally, two X'' groups may be covalently bound together forming a divalent dianionic moiety having both valences bound to M, or, optionally 2 X'' groups may be covalently bound together to form a neutral, conjugated or
10 nonconjugated diene that is π -bonded to M (whereupon M is in the +2 oxidation state), or further optionally one or more X'' and one or more X' groups may be bonded together thereby forming a moiety that is both covalently bound to M and coordinated thereto by means of Lewis base functionality;

ℓ is 0, 1 or 2;

15 m is 0 or 1;


n is a number from 0 to 3;

p is an integer from 0 to 3; and

the sum, $\ell+m+p$, is equal to the formal oxidation state of M, except when 2 X'' groups together form a neutral conjugated or non-conjugated diene that is π -bonded
20 to M, in which case the sum $\ell+m$ is equal to the formal oxidation state of M.

Preferred complexes include those containing either one or two L groups. The latter complexes include those containing a bridging group linking the two L groups. Preferred bridging groups are those corresponding to the formula $(ER^*_2)_x$ wherein E is silicon, germanium, tin, or carbon, R* independently each occurrence is
25 hydrogen or a group selected from silyl, hydrocarbyl, hydrocarbyloxy and combinations thereof, said R* having up to 30 carbon or silicon atoms, and x is 1 to 8. Preferably, R* independently each occurrence is methyl, ethyl, propyl, benzyl, tert-butyl, phenyl, methoxy, ethoxy or phenoxy.

Examples of the complexes containing two L groups are compounds
30 corresponding to the formula:

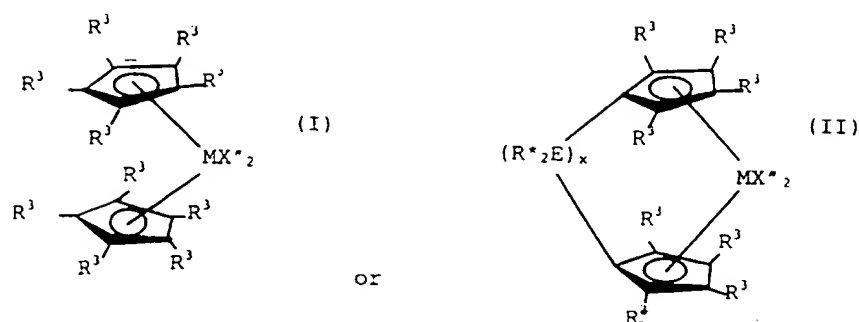

wherein:

M is zirconium, zirconium or hafnium, preferably zirconium or hafnium, in the +2 or +4 formal oxidation state;

- 5 R^3 in each occurrence independently is selected from the group consisting of hydrogen, hydrocarbyl, silyl, germyl, cyano, halo and combinations thereof, said R^3 having up to 20 non-hydrogen atoms, or adjacent R^3 groups together form a divalent derivative (that is, a hydrocarbadiyl, siladiyl or germadiyl group) thereby forming a fused ring system, and
- 10 X'' independently each occurrence is an anionic ligand group of up to 40 non-hydrogen atoms, or two X'' groups together form a divalent anionic ligand group of up to 40 non-hydrogen atoms or together are a conjugated diene having from 4 to 30 non-hydrogen atoms forming a π -complex with M , whereupon M is in the +2 formal oxidation state, and
- 15 R^* , E and x are as previously defined.

- The foregoing metal complexes are especially suited for the preparation of polymers having stereoregular molecular structure. In such capacity it is preferred that the complex possesses C_s symmetry or possesses a chiral, stereorigid structure. Examples of the first type are compounds possessing different delocalized π -bonded systems, such as one cyclopentadienyl group and one fluorenyl group. Similar
- 20 systems based on $Ti(IV)$ or $Zr(IV)$ were disclosed for preparation of syndiotactic olefin polymers in Ewen, et al., J. Am. Chem. Soc. 110, 6255-6256 (1980). Examples of chiral structures include rac bis-indenyl complexes. Similar systems based on $Ti(IV)$ or $Zr(IV)$ were disclosed for preparation of isotactic olefin polymers in Wild et al., J. Organomet. Chem., 232, 233-47, (1982).
 - 25

Exemplary bridged ligands containing two π -bonded groups are: (dimethylsilyl-bis(cyclopentadienyl)), (dimethylsilyl-bis(methylcyclopentadienyl)), (dimethylsilyl-bis(ethylcyclopentadienyl)), (dimethylsilyl-bis(t-butylcyclopentadienyl)), (dimethylsilyl-


bis(tetramethylcyclopentadienyl)), (dimethylsilyl-bis(indenyl)), (dimethylsilyl-bis(tetrahydroindenyl)), (dimethylsilyl-bis(fluorenyl)), (dimethylsilyl-bis(tetrahydrofluorenyl)), (dimethylsilyl-bis(2-methyl-4-phenylindenyl)), (dimethylsilyl-bis(2-methylindenyl)), (dimethylsilyl-cyclopentadienyl-fluorenyl), (dimethylsilyl-cyclopentadienyl-octahydrofluorenyl), (dimethylsilyl-cyclopentadienyl-tetrahydrofluorenyl), (1, 1, 2, 2-tetramethyl-1, 2-disilyl-bis-cyclopentadienyl), (1, 2-bis(cyclopentadienyl)ethane, and (isopropylidene-cyclopentadienyl-fluorenyl).

Preferred X" groups are selected from hydride, hydrocarbyl, silyl, germyl, halohydrocarbyl, halosilyl, silylhydrocarbyl and aminohydrocarbyl groups, or two X" groups together form a divalent derivative of a conjugated diene or else together they form a neutral, π -bonded, conjugated diene. Most preferred X" groups are C₁-20 hydrocarbyl groups.

A further class of metal complexes utilized in the present invention corresponds to the preceding formula $L_2MX_mX'_nX''_p$, or a dimer thereof, wherein X is a divalent substituent of up to 50 non-hydrogen atoms that together with L forms a metallocycle with M.

Preferred divalent X substituents include groups containing up to 30 non-hydrogen atoms comprising at least one atom that is oxygen, sulfur, boron or a member of Group 14 of the Periodic Table of the Elements directly attached to the delocalized π -bonded group, and a different atom, selected from the group consisting of nitrogen, phosphorus, oxygen or sulfur that is covalently bonded to M.

A preferred class of such Group 4 metal coordination complexes used according to the present invention corresponds to the formula:



wherein:

M is titanium or zirconium, preferably titanium in the +2, +3, or +4 formal oxidation state;

R^3 in each occurrence independently is selected from the group consisting of hydrogen, hydrocarbyl, silyl, germyl, cyano, halo and combinations thereof, said R^3 having up to 20 non-hydrogen atoms, or adjacent R^3 groups together form a divalent derivative (that is, a hydrocarbadiyl, siladiyl or germadiyl group) thereby forming a fused ring system.

each X'' is a halo, hydrocarbyl, hydrocarbyloxy or silyl group, said group having up to 20 non-hydrogen atoms, or two X'' groups together form a neutral C₅₋₃₀ conjugated diene or a divalent derivative thereof;

Y is -O-, -S-, -NR*, -PR*-, and

Z is SiR^*_2 , CR^*_2 , $SiR^*_2SiR^*_2$, $CR^*_2CR^*_2$, $CR^*=CR^*$, $CR^*_2SiR^*_2$, or GeR^*_2 , wherein R^* is as previously defined.

Illustrative Group 4 metal complexes that may be employed in the practice of the present invention include:

- cyclopentadienyltitaniumtrimethyl,
- 15 cyclopentadienyltitaniumtriethyl,
- cyclopentadienyltitaniumtriisopropyl,
- cyclopentadienyltitaniumtriphenyl,
- cyclopentadienyltitaniumtribenzyl,
- cyclopentadienyltitanium-2,4-dimethylpentadienyl,
- 20 cyclopentadienyltitanium-2,4-dimethylpentadienyl•triethylphosphine,
- cyclopentadienyltitanium-2,4-dimethylpentadienyl•trimethylphosphine,
- cyclopentadienyltitaniumdimethylmethoxide,
- cyclopentadienyltitaniumdimethylchloride,
- pentamethylcyclopentadienyltitaniumtrimethyl,
- 25 indenyltitaniumtrimethyl,
- indenyltitaniumtriethyl,
- indenyltitaniumtripropyl,
- indenyltitaniumtriphenyl,
- tetrahydroindenyltitaniumtribenzyl,
- 30 pentamethylcyclopentadienyltitaniumtriisopropyl,
- pentamethylcyclopentadienyltitaniumtribenzyl,
- pentamethylcyclopentadienyltitaniumdimethylmethoxide,
- pentamethylcyclopentadienyltitaniumdimethylchloride,
- bis(η^5 -2,4-dimethylpentadienyl)titanium,
- 35 bis(η^5 -2,4-dimethylpentadienyl)titanium•triethylphosphine,
- bis(η^5 -2,4-dimethylpentadienyl)titanium•triethylphosphine,

- octahydrofluorenyltitaniumtrimethyl,
 tetrahydroindenyltitaniumtrimethyl,
 tetrahydrofluorenyltitaniumtrimethyl,
 (tert-butylamido)(1,1-dimethyl-2,3,4,9,10- η -1,4,5,6,7,8-
 5 hexahydronaphthalenyl)dimethylsilanetitaniumdimethyl,
 (tert-butylamido)(1,1,2,3-tetramethyl-2,3,4,9,10- η -1,4,5,6,7,8-
 hexahydronaphthalenyl)dimethylsilanetitaniumdimethyl,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium dibenzyl,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium dimethyl,
 10 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyltitanium dimethyl,
 (tert-butylamido)(tetramethyl- η^5 -indenyl)dimethylsilanetitanium dimethyl,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilane titanium (III)
 2-(dimethylamino)benzyl;
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (III) allyl,
 15 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (III)
 2,4-dimethylpentadienyl,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (II)
 1,4-diphenyl-1,3-butadiene,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (II)
 20 1,3-pentadiene,
 (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (II) 1,4-diphenyl-1,3-
 butadiene,
 (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (II) 2,4-hexadiene,
 (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (IV) 2,3-dimethyl-1,3-
 25 butadiene,
 (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (IV) isoprene,
 (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (IV) 1,3-butadiene,
 (tert-butylamido)(2,3-dimethylindenyl)dimethylsilanetitanium (IV)
 2,3-dimethyl-1,3-butadiene,
 30 (tert-butylamido)(2,3-dimethylindenyl)dimethylsilanetitanium (IV)
 isoprene
 (tert-butylamido)(2,3-dimethylindenyl)dimethylsilanetitanium (IV) dimethyl
 (tert-butylamido)(2,3-dimethylindenyl)dimethylsilanetitanium (IV) dibenzyl
 (tert-butylamido)(2,3-dimethylindenyl)dimethylsilanetitanium (IV) 1,3-butadiene,
 35 (tert-butylamido)(2,3-dimethylindenyl)dimethylsilanetitanium (II) 1,3-pentadiene,
 (tert-butylamido)(2,3-dimethylindenyl)dimethylsilanetitanium (II) 1,4-diphenyl-
 1,3-butadiene,

- (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (II) 1,3-pentadiene,
 (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (IV) dimethyl,
 (tert-butylamido)(2-methylindenyl)dimethylsilanetitanium (IV) dibenzyl,
 (tert-butylamido)(2-methyl-4-phenylindenyl)dimethylsilanetitanium (II)
- 5 1,4-diphenyl-1,3-butadiene,
 (tert-butylamido)(2-methyl-4-phenylindenyl)dimethylsilanetitanium (II) 1,3-pentadiene,
 (tert-butylamido)(2-methyl-4-phenylindenyl)dimethylsilanetitanium (II) 2,4-hexadiene,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (IV)
 1,3-butadiene,
- 10 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (IV)
 2,3-dimethyl-1,3-butadiene,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (IV)
 isoprene,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (II)
- 15 1,4-dibenzyl-1,3-butadiene,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (II)
 2,4-hexadiene,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)dimethylsilanetitanium (II)
 3-methyl-1,3-pentadiene,
- 20 (tert-butylamido)(2,4-dimethylpentadien-3-yl)dimethylsilanetitaniumdimethyl,
 (tert-butylamido)(6,6-dimethylcyclohexadienyl)dimethylsilanetitaniumdimethyl,
 (tert-butylamido)(1,1-dimethyl-2,3,4,9,10- η -1,4,5,6,7,8-hexahydronaphthalen-4-yl)dimethylsilanetitaniumdimethyl,
 (tert-butylamido)(1,1,2,3-tetramethyl-2,3,4,9,10- η -1,4,5,6,7,8-
- 25 hexahydronaphthalen-4-yl)dimethylsilanetitaniumdimethyl
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl methylphenylsilanetitanium (IV)
 dimethyl,
 (tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl methylphenylsilanetitanium (II)
 1,4-diphenyl-1,3-butadiene,
- 30 1-(tert-butylamido)-2-(tetramethyl- η^5 -cyclopentadienyl)ethanediyltitanium (IV)
 dimethyl, and
 1-(tert-butylamido)-2-(tetramethyl- η^5 -cyclopentadienyl)ethanediyltitanium (II) 1,4-diphenyl-1,3-butadiene.

Complexes containing two L groups including bridged complexes suitable for
 35 use in the present invention include:

bis(cyclopentadienyl)zirconiumdimethyl,
 bis(cyclopentadienyl)zirconium dibenzyl,

- bis(cyclopentadienyl)zirconium methyl benzyl,
 bis(cyclopentadienyl)zirconium methyl phenyl,
 bis(cyclopentadienyl)zirconium diphenyl,
 bis(cyclopentadienyl)titanium-allyl,
 5 bis(cyclopentadienyl)zirconium methylmethoxide,
 bis(cyclopentadienyl)zirconium methylchloride,
 bis(pentamethylcyclopentadienyl)zirconium dimethyl,
 bis(pentamethylcyclopentadienyl)titanium dimethyl,
 bis(indenyl)zirconium dimethyl,
 10 indenylfluorenyl zirconium dimethyl,
 bis(indenyl)zirconium methyl(2-(dimethylamino)benzyl),
 bis(indenyl)zirconium methyltrimethylsilyl,
 bis(tetrahydroindenyl)zirconium methyltrimethylsilyl,
 bis(pentamethylcyclopentadienyl)zirconium methylbenzyl,
 15 bis(pentamethylcyclopentadienyl)zirconium dibenzyl,
 bis(pentamethylcyclopentadienyl)zirconium methylmethoxide,
 bis(pentamethylcyclopentadienyl)zirconium methylchloride,
 bis(methylethylcyclopentadienyl)zirconium dimethyl,
 bis(butylcyclopentadienyl)zirconium dibenzyl,
 20 bis(t-butylcyclopentadienyl)zirconium dimethyl,
 bis(ethyltetramethylcyclopentadienyl)zirconium dimethyl,
 bis(methylpropylcyclopentadienyl)zirconium dibenzyl,
 bis(trimethylsilylcyclopentadienyl)zirconium dibenzyl,
 dimethylsilyl-bis(cyclopentadienyl)zirconium dimethyl,
 25 dimethylsilyl-bis(tetramethylcyclopentadienyl)titanium-(III) allyl
 dimethylsilyl-bis(t-butylcyclopentadienyl)zirconium dichloride,
 dimethylsilyl-bis(n-butylcyclopentadienyl)zirconium dichloride,
 (methylene-bis(tetramethylcyclopentadienyl)titanium(III) 2-(dimethylamino)benzyl,
 (methylene-bis(n-butylcyclopentadienyl)titanium(III) 2-(dimethylamino)benzyl,
 30 dimethylsilyl-bis(indenyl)zirconium benzylchloride,
 dimethylsilyl-bis(2-methylindenyl)zirconium dimethyl,
 dimethylsilyl-bis(2-methyl-4-phenylindenyl)zirconium dimethyl,
 dimethylsilyl-bis(2-methylindenyl)zirconium-1,4-diphenyl-1,3-butadiene,
 dimethylsilyl-bis(2-methyl-4-phenylindenyl)zirconium (II) 1,4-diphenyl-1,3-butadiene,
 35 dimethylsilyl-bis(tetrahydroindenyl)zirconium (II) 1,4-diphenyl-1,3-butadiene,
 dimethylsilyl-bis(fluorenyl)zirconium methylchloride,
 dimethylsilyl-bis(tetrahydrofluorenyl)zirconium bis(trimethylsilyl),

(isopropylidene)(cyclopentadienyl)(fluorenyl)zirconiumdibenzyl, and dimethylsilyl(tetramethylcyclopentadienyl)(fluorenyl)zirconium dimethyl.

Other catalysts, especially catalysts containing other Group 4 metals, will, of course, be apparent to those skilled in the art.

5 The cocatalysts of the invention may also be used in combination with a tri(hydrocarbyl)aluminum compound having from 1 to 10 carbons in each hydrocarbyl group, an oligomeric or polymeric alumoxane compound, a
 10 di(hydrocarbyl)(hydrocarbyloxy)aluminum compound having from 1 to 20 carbons in each hydrocarbyl or hydrocarbyloxy group, or a mixture of the foregoing compounds, if desired. These aluminum compounds are usefully employed for their beneficial ability to scavenge impurities such as oxygen, water, and aldehydes from the polymerization mixture.

15 Suitable di(hydrocarbyl)(hydrocarbyloxy)aluminum compounds correspond to the formula $T^1_2AlOT^2$ wherein T^1 is C_{3-6} secondary or tertiary alkyl, most preferably isopropyl, isobutyl or tert-butyl; and T^2 is a C_{12-30} alkaryl radical or aralkyl radical, most preferably, 2,6-di(t-butyl)-4-methylphenyl, 2,6-di(t-butyl)-4-methyltolyl, 2,6-di(i-butyl)-4-methylphenyl, or 4-(3',5'-ditertiarybutyltolyl)-2,6-ditertiarybutylphenyl.

20 Preferred aluminum compounds include C_{2-6} trialkyl aluminum compounds, especially those wherein the alkyl groups are ethyl, propyl, isopropyl, n-butyl, isobutyl, pentyl, neopentyl, or isopentyl, dialkyl(aryloxy)aluminum compounds containing from 1-6 carbons in the alkyl group and from 6 to 18 carbons in the aryl group (especially (3,5-di(t-butyl)-4-methylphenoxy)diisobutylaluminum), methylalumoxane, modified methylalumoxane and diisobutylalumoxane. The molar ratio of aluminum compound to metal complex is preferably from 1:10,000 to 1000:1, more preferably from 1:5000
 25 to 100:1, most preferably from 1:100 to 100:1.

 The molar ratio of catalyst/cocatalyst employed preferably ranges from 1:10 to 10:1, more preferably from 1:5 to 1:1, most preferably from 1:1.5 to 1:1. Mixtures of the activating cocatalysts of the present invention may also be employed if desired.

30 Suitable addition polymerizable monomers include ethylenically unsaturated monomers, acetylenic compounds, conjugated or non-conjugated dienes, and polyenes. Preferred monomers include olefins, for examples alpha-olefins having from 2 to 20,000, preferably from 2 to 20, more preferably from 2 to 8 carbon atoms and combinations of two or more of such alpha-olefins. Particularly suitable alpha-olefins include, for example, ethylene, propylene, 1-butene, 1-pentene, 4-
 35 methylpentene-1, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene,

1-dodecene, 1-tridecene, 1-tetradecene, 1-pentadecene, or combinations thereof, as well as long chain vinyl terminated oligomeric or polymeric reaction products formed during the polymerization, and ~~C₁₀₋₃₀ α-olefins specifically added to the reaction~~ mixture in order to produce relatively long chain branches in the resulting polymers.

- 5 Preferably, the alpha-olefins are ethylene, propene, 1-butene, 4-methyl-pentene-1, 1-hexene, 1-octene, and combinations of ethylene and/or propene with one or more of such other alpha-olefins. Other preferred monomers include styrene, halo- or alkyl substituted styrenes, tetrafluoroethylene, vinylcyclobutene, 1,4-hexadiene, dicyclopentadiene, ethylidene norbornene, and 1,7-octadiene. Mixtures of the above-
10 mentioned monomers may also be employed.

In general, the polymerization may be accomplished at conditions well known in the prior art for Ziegler-Natta or Kaminsky-Sinn type polymerization reactions. Suspension, solution, slurry, gas phase or high pressure, whether employed in batch or continuous form or other process conditions, may be employed if desired.

- 15 Examples of such well known polymerization processes are depicted in WO 88/02009, U.S. Patent Nos. 5,084,534, 5,405,922, 4,588,790, 5,032,652, 4,543,399, 4,564,647, 4,522,987, and elsewhere. Preferred polymerization temperatures are from 0-250°C. Preferred polymerization pressures are from atmospheric to 3000 atmospheres.

- 20 However, the advantages of the invention are particularly noticed when the present catalyst system is used in a solution polymerization, more preferably a continuous solution polymerization process, in the presence of an aliphatic or alicyclic liquid diluent. By the term "continuous polymerization" is meant that at least the products of the polymerization are continuously removed from the reaction mixture,
25 such as for example by devolatilization of a portion of the reaction mixture. Preferably one or more reactants are also continuously added to the polymerization mixture during the polymerization. Examples of suitable aliphatic or alicyclic liquid diluents include straight and branched-chain hydrocarbons such as isobutane, butane, pentane, hexane, heptane, octane, and mixtures thereof; alicyclic
30 hydrocarbons such as cyclohexane, cycloheptane, methylcyclohexane, methylcycloheptane, and mixtures thereof; and perfluorinated hydrocarbons such as perfluorinated C₄₋₁₀ alkanes, and the like. Suitable diluents also include aromatic hydrocarbons (particularly for use with aromatic α-olefins such as styrene or ring
alkyl-substituted styrenes) including toluene, ethylbenzene or xylene, as well as liquid
35 olefins (which may act as monomers or comonomers) including ethylene, propylene, butadiene, cyclopentene, 1-hexene, 3-methyl-1-pentene, 4-methyl-1-pentene, 1,4-hexadiene, 1-octene, 1-decene, styrene, divinylbenzene, allylbenzene, vinyltoluene

(including all isomers alone or in admixture), and the like. Mixtures of the foregoing are also suitable.

In most polymerization reactions the molar ratio of catalyst:polymerizable compounds employed is from $10^{-12}:1$ to $10^{-1}:1$, more preferably from $10^{-12}:1$ to $10^{-5}:1$.

The catalyst system of the invention may also be utilized in combination with at least one additional homogeneous or heterogeneous polymerization catalyst in separate reactors connected in series or in parallel to prepare polymer blends having desirable properties. An example of such a process is disclosed in WO 94/00500, equivalent to U. S. Serial Number 07/904,770. A more specific process is disclosed in copending application U. S. Serial Number 08/10958, filed January 29, 1993.

Molecular weight control agents can be used in combination with the present cocatalysts. Examples of such molecular weight control agents include hydrogen, trialkyl aluminum compounds or other known chain transfer agents. A particular benefit of the use of the present cocatalysts is the ability (depending on reaction conditions) to produce narrow molecular weight distribution α -olefin homopolymers and copolymers in greatly improved catalyst efficiencies. Preferred polymers have Mw/Mn of less than 2.5, more preferably less than 2.3. Such narrow molecular weight distribution polymer products are highly desirable due to improved tensile strength properties.

It is understood that the present invention is operable in the absence of any component which has not been specifically disclosed. The following examples are provided in order to further illustrate the invention and are not to be construed as limiting. Unless stated to the contrary, all parts and percentages are expressed on a weight basis.

Example 1

Preparation of di(octadecyl)methylammonium tetrakis(pentafluorophenyl)borate $((C_{18}H_{37})_2N(Me)H^+ B(C_6F_5)_4^-)$

di(octadecyl)methylammonium chloride $((C_{18}H_{37})_2NMeH^+ Cl^-)$

0.50 g of dioctadecylmethylamine $((C_{18}H_{37})_2N(Me))$ (Aldrich Chemical) was dissolved in ~50 mL of hexane. HCl in Et₂O (1M, Aldrich, 1.17 mL) was added by syringe, resulting in the immediate formation of a white precipitate. The mixture was

stirred for several hours, then filtered through a medium porosity (10-15 μm) frit. The solid that remained on the frit was washed with additional hexane, then dried on the frit and finally under vacuum. Approximately 0.56 g of product as a white solid was obtained.

5 Preparation A)

In the drybox, 0.50 g of $\text{LiB}(\text{C}_6\text{F}_5)_4$ and 0.38 g of $(\text{C}_{18}\text{H}_{37})_2\text{N}(\text{Me})\text{H}^+\text{Cl}^-$ were mixed as solids in a small jar. The jar was removed from the drybox and 30 mL of distilled water was added. The $\text{LiB}(\text{C}_6\text{F}_5)_4$ appeared to dissolve, but the amine hydrochloride floated on top of the liquid. The mixture was placed on a mechanical shaker for one hour. During this time, the amine hydrochloride slowly disappeared and was replaced by a sticky white precipitate which adhered to the walls of the jar. At the end of one hour, 20 mL of toluene was added and the mixture placed on the shaker again for 10 minutes. The mixture was then poured into a separatory funnel and 20 mL of saturated aqueous sodium carbonate was added. The layers were separated and the aqueous layer discarded. The organic layer was washed with 20 mL of H_2O , dried over MgSO_4 , and filtered into a small Schlenk tube. The volatile materials were then removed under vacuum to leave a pale brown viscous oil. The Schlenk tube was taken into the drybox, and the oil dissolved in cyclohexane. This solution was made up to 10 mL using a volumetric flask. By weighing the Schlenk tube before and after removal of the product with cyclohexane, the product weight was determined to be 0.80 g. Assuming a molecular weight of 1216.08 g/mol for $(\text{C}_{18}\text{H}_{37})_2\text{N}(\text{Me})\text{H}^+\text{B}(\text{C}_6\text{F}_5)_4^-$ the solution concentration is calculated to be 0.066 M, 10.3 weight percent.

Preparation B)

In the drybox, 0.50 g of $\text{LiB}(\text{C}_6\text{F}_5)_4$ and 0.42 g of $(\text{C}_{18}\text{H}_{37})_2\text{N}(\text{Me})\text{H}^+\text{Cl}^-$ were slurried in 25 mL of toluene in a small bottle. The bottle was removed from the drybox and 20 mL of distilled water was added. The bottle was placed on a shaker and agitated thoroughly for one hour. At the end of this time, 20 mL of saturated aqueous sodium carbonate was added and the mixture transferred to a separatory funnel. The layers were separated and the aqueous layer discarded. The organic layer was washed with 20 mL of saturated Na_2CO_3 followed by 20 mL of H_2O , dried over MgSO_4 , and filtered. The volatile materials were then removed under vacuum to leave 0.71 g of a pale brown oil. The flask was taken into the drybox, and the oil was dissolved in 10 mL of mixed alkanes (Isopar™ E, available from Exxon Chemicals

Inc.) to give a solution concentration of 0.0075 M, 9.0 weight percent, which was then further diluted to give a final solution concentration of 0.0075 M.

Preparation C)

In the drybox, 0.50 g of $\text{LiB}(\text{C}_6\text{F}_5)_4$ and 0.42 g of $(\text{C}_{18}\text{H}_{37})_2\text{N}(\text{Me})\text{H}^+\text{Cl}^-$ were
5 slurried in 20 mL of cyclohexane. The mixture was heated to reflux for 1.5 hours. Shortly after heating began, the solution became clear. At the end of the reflux time, the mixture was cooled to room temperature and filtered through a medium porosity (10-15 mm) fritted funnel using diatomaceous earth filter aid (Celite™). The solution
10 was transferred into a four ounce bottle and removed from the drybox, sparged briefly with nitrogen, then returned to the drybox. An aliquot was removed and the concentration measured by gravimetric analysis; a value of 0.022 M, 3.4 weight percent, was obtained for the solution concentration.

Polymerizations

A one gallon stirred reactor was charged with Isopar™ E solvent, 1-octene, and 5
15 mMol of hydrogen. The reactor was heated to 130°C and saturated with ethylene to 450 psig (3.1 MPa). The catalyst composition was prepared in a drybox by syringing together 2.5 mMol of (t-butylamido)dimethyl(η^5 -tetramethylcyclopentadienyl)titanium (η^4 -1,3-pentadiene) catalyst, di(octadecyl)methylammonium tetrakis(penta-fluorophenyl)borate cocatalyst (prepared by one of the foregoing preparations A), B)
20 or C), and optionally a third component (triisobutylaluminum modified methylalumoxane (MMAO), triisobutylaluminum (TIBA), or (2,6-di(t-butyl)-4-methylphenoxy)di(i-butyl)aluminum (DIBAL-BOT)). This mixture was then transferred by syringe to an addition loop and injected into the reactor over approximately 4 minutes. The polymerization was allowed to proceed for 10 minutes while feeding
25 ethylene on demand to maintain a pressure of 450 psig. (3.1 MPa). The polymer solution was either transferred from the reactor into a glass kettle followed by thorough drying using a vacuum oven or discarded. In cases where the polymer was isolated and dried, the catalyst efficiency was calculated as kilograms polymer per gram titanium. In cases where the polymer was not saved, the efficiency was
30 calculated as kilograms ethylene consumed during the reaction per gram of titanium. Details of the polymerizations are shown in Table 1.

Table 1

Run	Cocatalyst	3rd Component	solvent	Octene	Eff.		
	(μmol)	(μmol)	(g)	(g)	(Kg C ₂ H ₄ /gTi)		
1	A	2.5	MMAO	25	1426	138	0.8
2	A	3.75	"	"	1423	132	1.0
3	A	3.15	"	"	1415	138	0.9
4	A	5.0	"	"	1410	136	1.0
5	A	1.5	"	"	1433	137	0.5
6	A	3.75	none	0	1432	130	0.5
7	A	"	MMAO	25	1462	137	0.6
8	A	"	TIBA	"	1459	133	0.7
9	A	"	DIBAL-BOT	"	1470	130	0.9
10	B	"	"	50	1427	139	1.5
11	C	"	"	"	1420	140	0.9

Example 2**Preparation of bis(hydrogenated-tallowalkyl)methylammonium****5 tetrakis(pentafluorophenyl)borate ((C₁₈₋₂₂H₃₇₋₄₅)₂N⁺(Me)HB⁻(C₆F₅)₄)**

The synthetic steps of example 1, preparation C were substantially repeated excepting that the ammonium salt was prepared from the bis(hydrogenated-tallowalkyl)methylamine (a trialkyl amine containing a mixture of C₁₈₋₂₂ alkyl groups derived from tallow, available from Witco Corporation or Akzo Nobel).

10 Preparation A

Bis(hydrogenated-tallowalkyl)methylamine (KEMAMINE[®] T-9701 obtained from Witco Corporation; the molecular weight of this amine was calculated to be 513.8 from the "Total Amine Value" reported by the supplier) (5.65 g, 11.0 mmol) was dissolved in 50 mL of hexane. HCl in ether (1 M, 13.75 mL) was added by syringe, resulting in a white precipitate. The mixture was stirred for 30 minutes, then filtered using a glass frit having a pore size of 10-5 μm . The solid that remained was washed with hexane and dried under vacuum.

In the drybox, 1.20 g of the amine HCl salt obtained above (2.18 mmol) and 1.57 g of LiB(C₆F₅)₄ (2.29 mmol) were mixed in hexane and stirred for 2 hours at 25°C. At the end of this time, cyclohexane was added (10-15 mL) and the solution was filtered using a glass frit having a pore size of 10-15 μm and topped with a diatomaceous earth filter aid (Celite[™]). The concentration of this solution was measured gravimetrically to be 6.3 wt percent.

Preparation B

Bis(hydrogenated-tallowalkyl)methylamine (ARMEEN[®] M2HT obtained from Akzo Nobel; the molecular weight of this amine was reported on the certificate of analysis provided by the supplier to be 521.1) (5.00 g, 9.6 mmol) was dissolved in 50 mL of hexane. HCl in ether (1 M, 10.1 mL) was added by syringe, resulting in a white precipitate. The mixture was swirled by hand for 10 minutes, then filtered using a glass frit having a pore size of 10-15 μ m. The white solid that remained was washed with hexane and dried under vacuum.

In the drybox, 2.00 g of the amine HCl salt obtained above (3.59 mmol) and 2.58 g of LiB(C₆F₅)₄ (3.77 mmol) were mixed as solids. Cyclohexane (30 mL) was added and the mixture was stirred for 2 hours. At the end of this time, the mixture was filtered using a glass frit having a pore size of 10-15 μ m topped with Celite[™] filter aid) to give a clear, pale brown solution. The concentration of this solution was measured gravimetrically to be 10.3 wt percent.

Preparation C (*in situ* generation of hydrochloride salt)

Bis(hydrogenated-tallowalkyl)methylamine (ARMEEN[®] M2HT, 1.0 g, 1.92 mmol) was dissolved in 25 mL of methylcyclohexane. Aqueous HCl (1 M, 1.92 mL) was added by syringe. The mixture was stirred for 30 minutes, then a solution of LiB(C₆F₅)₄ (1.32 g, 1.92 mmol) dissolved in 20 mL of water was added. The mixture was stirred for another 30 minutes. It was then poured into a separatory funnel and 50 mL of saturated aqueous NaCl was added. The layers were separated and the aqueous layer discarded. The organic layer was dried over MgSO₄ overnight. The mixture was then filtered using a glass frit having a pore size of 10-15 μ m to give a clear pale brown solution. The solution was transferred to a bottle, sparged thoroughly with nitrogen, and taken into the drybox. The concentration of this solution was measured gravimetrically to be 17.5 wt percent.

Preparation D: Large scale

Methylcyclohexane (1200 mL) was placed in a 2L cylindrical flask. While stirring, bis(hydrogenated-tallowalkyl)methylamine (ARMEEN[®] M2HT, 104 g, ground to a granular form) was added to the flask and stirred until completely dissolved. Aqueous HCl (1M, 200 mL) was added to the flask, and the mixture was stirred for 30 minutes. A white precipitate formed immediately. At the end of this time, LiB(C₆F₅)₄ • Et₂O • 3 LiCl (MW = 887.3; 177.4 g) was added to the flask. The solution began to

turn milky white. The flask was equipped with a 6" Vigreux column topped with a distillation apparatus and the mixture was heated (140 °C external wall temperature). A mixture of ether and methylcyclohexane was distilled from the flask. The two-phase solution was now only slightly hazy. The mixture was allowed to cool to room temperature, and the contents were placed in a 4 L separatory funnel. The aqueous layer was removed and discarded, and the organic layer was washed twice with H₂O and the aqueous layers again discarded. The product solution was divided into two equal portions for the evaluation of two workup procedures. These H₂O saturated methylcyclohexane solutions were measured to contain 0.48 wt percent diethylether (Et₂O).

Workup Procedure b 13X Molecular Sieve Technique

The solution (600 mL) was transferred into a 1 L flask, sparged thoroughly with nitrogen, and transferred into the drybox. The solution was passed through a column (1" diameter, 6" height) containing 13X molecular sieves. This reduced the level of Et₂O from 0.48 wt percent to 0.28 wt percent. The material was then stirred over fresh 13X sieves (20 g) for four hours. The Et₂O level was then measured to be 0.19 wt percent. The mixture was then stirred overnight, resulting in a further reduction in Et₂O level to approximately 40 ppm. The mixture was filtered using a funnel equipped with a glass frit having a pore size of 10-15 µm to give a clear solution (the molecular sieves were rinsed with additional dry methylcyclohexane). The concentration was measured by gravimetric analysis yielding a value of 16.7 wt percent.

Workup Procedure b Vacuum Technique

The solution (600 mL) was transferred to a 1 L flask and 35 g MgSO₄ was added. The mixture was stirred for 5 minutes, then filtered through a funnel equipped with a glass frit having a pore size of 10-15 µm into a second 1 L flask. The clear solution was sparged thoroughly with N₂, and transferred into the drybox. The volatile materials were removed under vacuum to leave a clear, pale yellow oil. This oil was redissolved in dry, deoxygenated methylcyclohexane and the concentration was measured by gravimetric analysis (23.5 wt percent). Analysis by GC indicated that the solution contained <20 ppm Et₂O.

Polymerization

The polymerization conditions of Example 1 were substantially repeated using the above tallow amine salt derivatives as activators and various transition metal complexes as catalysts. Results are contained in

5 Table 2.

Table 2

Run	Catalys ^t (μ mol)	Cocat Prep (μ mol)	3 rd Component (μ mol)	Solvent (g)	Octene (g)	Efficiency (Kg C ₂ H ₄ /g Ti)
12	A (1.5)	A (2.25)	DIBAL-BOT (15)	1461	135	1.35
13	A (1.5)	B (2.25)	DIBAL-BOT (15)	1461	137	1.35
14	A (1.5)	C (2.25)	DIBAL-BOT (15)	1453	139	1.90
15	B (0.5)	C (0.75)	DIBAL-BOT (5)	1444	137	3.29
16	A (0.5)	C (0.75)	DIBAL-BOT (5)	1462	140	4.02
17	B (0.5)	C (0.75)	DIBAL-BOT (5)	1456	137	2.51
18	C (0.5)	C (0.75)	DIBAL-BOT (5)	1450	138	2.77

* A = (t-butylamido)dimethyl(η^5 -tetramethylcyclopentadienyl)titanium (η^4 -1,3-pentadiene)
 B = (isopropylamido)(dimethyl)(η^5 -2,3,4,6-tetramethylindenyl)titanium dimethyl
 C = (t-butylamido)(dimethyl)(η^5 -2,3,4,6-tetramethylindenyl)titanium dimethyl

10

Example 3

Preparation of di(hydrogenated tallowalkyl)methylammonium methyl)tris-(pentafluorophenyl)phenylborate ((C₁₈₋₂₂H₃₇₋₄₅)₂N(Me)H⁺B(C₆H₅)(C₆F₅)₃)⁻

The synthetic steps of example 2 were substantially repeated excepting that
 15 the borate salt was the lithium salt of methyltris(pentafluorophenyl)borate.

Polymerizations

A one gallon stirred reactor was charged with 1440 mL Isopar™ E solvent, 126 g of 1-octene, and hydrogen (about 25 ml at 35 Δ psi, 0.24 Δ MPa). The reactor was heated to 130°C and saturated with ethylene to 450 psig (3.1 MPa). The catalyst
 20 composition was prepared in a drybox by mixing together (t-butylamido)dimethyl(η^5 -tetramethylcyclopentadienyl)titanium (η^4 -1,3-pentadiene) catalyst, di(hydrogenated-tallowalkyl)methylammonium)tris(pentafluorophenyl)phenylborate and (triisobutylaluminum modified methylalumoxane (MMAO) to give atomic ratios of B/Ti of 1.5/1 and of Al/Ti of 10/1. This mixture was then transferred to an addition loop
 25 and injected into the reactor. The polymerization was allowed to proceed for 10 minutes while feeding ethylene on demand to maintain a pressure of 450 psig. (3.1

MPa). The polymer solution was transferred from the reactor into a glass kettle and dried in a vacuum oven at 120 °C for about 16 hours. Efficiency was 0.6 (Kg polymer/g Ti-metal).

Example 4

5 Preparation of di(docosyl)methylammonium tetrakis(pentafluorophenyl)borate (C₂₂H₄₅)₂(CH₃)NH B(C₆F₅)₄

- (C₂₂H₄₅)₂(CH₃)NH B(C₆F₅)₄ (ARMEEN® M2HE obtained from Akzo Nobel) (3.87 g, 5.97 mmol) was dissolved in 40 mL of hexane. Aqueous HCl (1 M, 5.97 mL) was added by syringe, resulting in the formation of a white precipitate. The mixture
- 10 was placed on a mechanical shaker and shaken vigorously for 30 minutes, then LiB(C₆F₅)₄ (4.30 g, 6.27 mmol) in a mixture of 30 mL of water and 20 mL of hexane was added. The mixture was shaken for another 30 minutes. It was then poured into a separatory funnel and the aqueous layer was removed. The organic layer was washed twice with 30 mL of saturated aqueous NaCl followed by two water washes.
- 15 The organic layer was dried over MgSO₄. The mixture was then filtered through a glass frit (10-15 µm) to give a clear pale brown solution. The solution was transferred to a bottle, sparged thoroughly with nitrogen, and taken into the drybox. The hexane was removed under vacuum to give a solid residue. This residue was triturated with 10 mL of pentane to yield a pale brown solid. This solid was re-dissolved in 35 - 40
- 20 mL of Isopar E, and the concentration of this solution was measured gravimetrically to be 18.0 weight percent.

Polymerization

- Substantially repeating the polymerization conditions of Example 1 using 1444 g mixed alkanes solvent, 124 g 1-octene comonomer, 1.0 µmol of (t-
- 25 butylamido)dimethyl (η⁵-tetramethylcyclopentadienyl)titanium (η⁴-1,3-pentadiene) catalyst, 1.0 µmol di(docosyl)methylammonium tetrakis(pentafluoro-phenyl)borate cocatalyst and 10µmole methylalumoxane scavenger resulted in the formation of ethylene/1-octene copolymer with an efficiency of 3.2 Kg polymer/ g Ti.

WHAT IS CLAIMED IS:

1. A catalyst activator comprising a cation which is a Bronsted acid capable of donating a proton, and an inert, compatible, noncoordinating, anion, characterized by a solubility at 25°C in hexane, cyclohexane or methylcyclohexane of
5 at least 5 weight percent.
2. A catalyst activator according to claim 1 wherein the activator is represented by the following general formula: $[L^+-H]^+A^-$, wherein:
 L^+ is a nitrogen, sulfur or phosphorus containing Lewis base; and
 A^- is a noncoordinating anion.
- 10 3. A catalyst activator according to claim 2 wherein the noncoordinating anion is tetrakis(pentafluorophenyl)borate.
4. A catalyst activator according to claim 2 wherein the Lewis base comprises from 1 to 3 C_{10-40} alkyl groups with a total of from 12 to 100 carbons.
5. A catalyst activator according to claim 2 wherein the Lewis base
15 comprises 2 C_{10-40} alkyl groups and from 21 to 90 total carbons.
6. A catalyst activator according to claim 1 which is di(octadecyl)methylammonium tetrakis(pentafluorophenyl)borate, or di(hydrogenated-tallowalkyl)methylammonium tetrakis(pentafluorophenyl)borate.
7. A catalyst system for polymerization of α -olefins comprising a Group 4
20 metal complex and a catalyst activator according to any one of claims 1-6.
8. A polymerization process comprising contacting one or more α -olefins under polymerization conditions with a catalyst system according to claim 7.
9. A process according to claim 8 which is a solution polymerization.
10. A polymerization process according to claim 9 which is a continuous
25 solution polymerization.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/04234

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C08F4/603 C08F10/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08F C07F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DATABASE WPI Section Ch, Week 8826 Derwent Publications Ltd., London, GB; Class B03, AN 88-178980 XP002033244 & JP 63 115 876 A (MITSUBISHI PETROCHEMICAL CO LTD) , 20 May 1988 see abstract</p> <p style="text-align: center;">---</p>	1
A	<p>DATABASE WPI Section Ch, Week 7949 Derwent Publications Ltd., London, GB; Class B04, AN 79-884798 XP002033245 & JP 54 139 284 A (ASAHI CHEM IND CO LTD) , 29 October 1979 see abstract</p> <p style="text-align: center;">-----</p>	1

☐ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search 18 June 1997	Date of mailing of the international search report 18.07.97
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax (+ 31-70) 340-3016	Authorized officer Fischer, B